


368



| | |
|--------|-------|
| Ampere | 125 A |
| | 5 . |
| | 400 V |
| | 6 |
| | 50-60 |
| T | |
| | IP 67 |

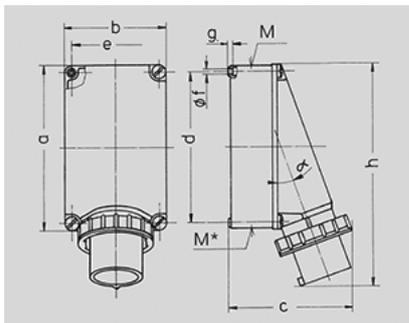

| Чертеж | A | 63 | | | 125 | |
|-----------------------------|-------|--------|-------|-----|-----|---|
| | | Полоса | | | 4 | 5 |
| 2 MB 36 | | 3 | 4 | 5 | 4 | 5 |
| Размеры, мм. | | | | | | |
| a | 170 | 170 | 170 | 264 | 264 | |
| b | 118 | 118 | 118 | 163 | 163 | |
| c | 171 | 171 | 171 | 205 | 205 | |
| d | 134,5 | 134,5 | 134,5 | 240 | 240 | |
| e | 103 | 103 | 103 | 140 | 140 | |
| f | 6,1 | 6,1 | 6,1 | 8,1 | 8,1 | |
| g | 6 | 6 | 6 | 8 | 8 | |
| h | 250 | 250 | 250 | 355 | 355 | |
| M | 40 | 40 | 40 | 50 | 50 | |
| M* | 2x40 | 2x40 | 2x40 | 50 | 50 | |
| α | 25° | 25° | 25° | 20° | 20° | |
| Макс. сечение кабеля до мм. | 27 | 27 | 27 | 38 | 38 | |
| Клеммы для кабеля | 6 | 6 | 6 | 16 | 16 | |
| сечением от до мм² | -16 | -16 | -16 | -35 | -35 | |